


LED High Bay Light

UFO 13 20W-50W

200LM/W

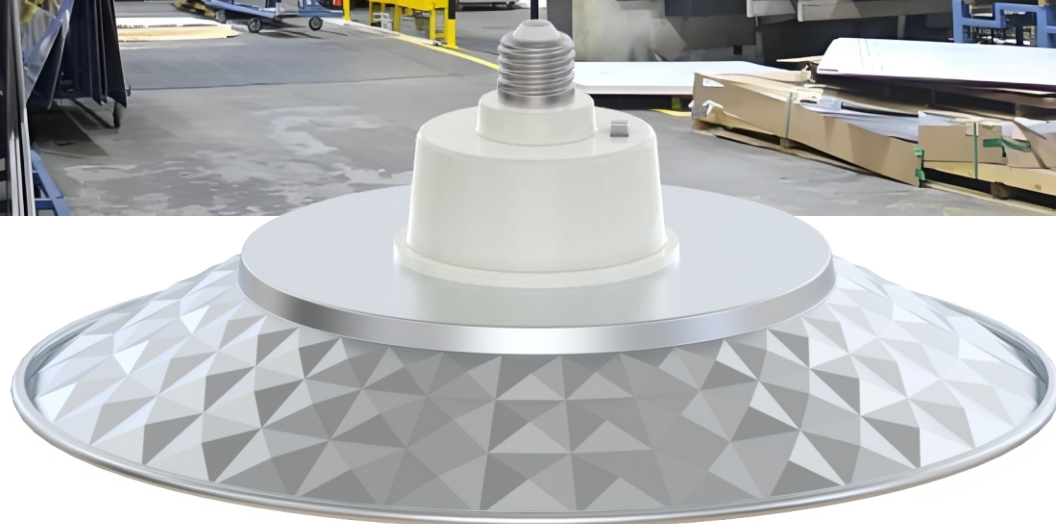

5 Years Warranty

CE RoHS

UFO13 20W-50W

Specification

Power	30W			50W		
PF	>0.95					
Input Voltage (V)	200-240VAC					
CRI	Ra70					
Efficacy (lm/W)	200					
Lumen output	20W: 4000lm	25W: 5000lm	30W: 6000lm	40W: 8000lm	45W: 9000lm	50W: 10000lm
CCT (K)	3000K/3500K/4000K/4500K/5000K/5700K					
Power selectable	LOW/MID/HIGH					
Beam angle	90°					
Material	Body Aluminum+ PC Lens					
Operating Temperature	-30°C~+40°C					
Humidity	10%-90%					
Base Type	E26/E27					
LED Type	SMD2835					
Power Supply	Stronglumen					
Surge Protection	2KV					
Certification	CE/RoHS					
IP Rate	IP 40					
Warranty	5 Years					

SA-UFOA00-XXXY-XXXX-E

SA-UFO	A00	XXX	Y	XXXX	E
Series	Voltage	Power	CCT	Lens	Versions
SA-UFO	200-240V	30W 50W	N 3000K M 3500K L 4000K K 4500K C 5000K H 5700K	R090 Lens 90° R120 Lens 120°	"E" The second generation

Description:

Model name description: SA-UFOA00-50Y-RXXX-E.

"SA" indicates the name of company producing the product;

"UFO" indicates the product is a LED High Bay;

"A00" indicates the voltage of the product;

"50" indicates the power of the product;

"Y" indicates the colour temperature of the product ;

Where the "Y" can be N=3000K, M=3500K, L=4000K, K=4500K, C=5000K, H=5700K represents color temperature;

Where XXXX represent light angle, it can be R090,R120;


"E" indicates the shape size;

UFO13 20W-50W

Packing

Model No.	Power	Size(mm)	N.W	Carton Size(mm)	G.W/1PCS±0.2KG
SA-UFOA00-30Y-XXXX-E	20-30W	Φ300x123mm	0.36KG	L320xW320xH145	0.86KG
SA-UFOA00-50Y-XXXX-E	40-50W	Φ354x131mm	0.46KG	L375xW375xH150	1.06KG

Dimensions(unit: mm)

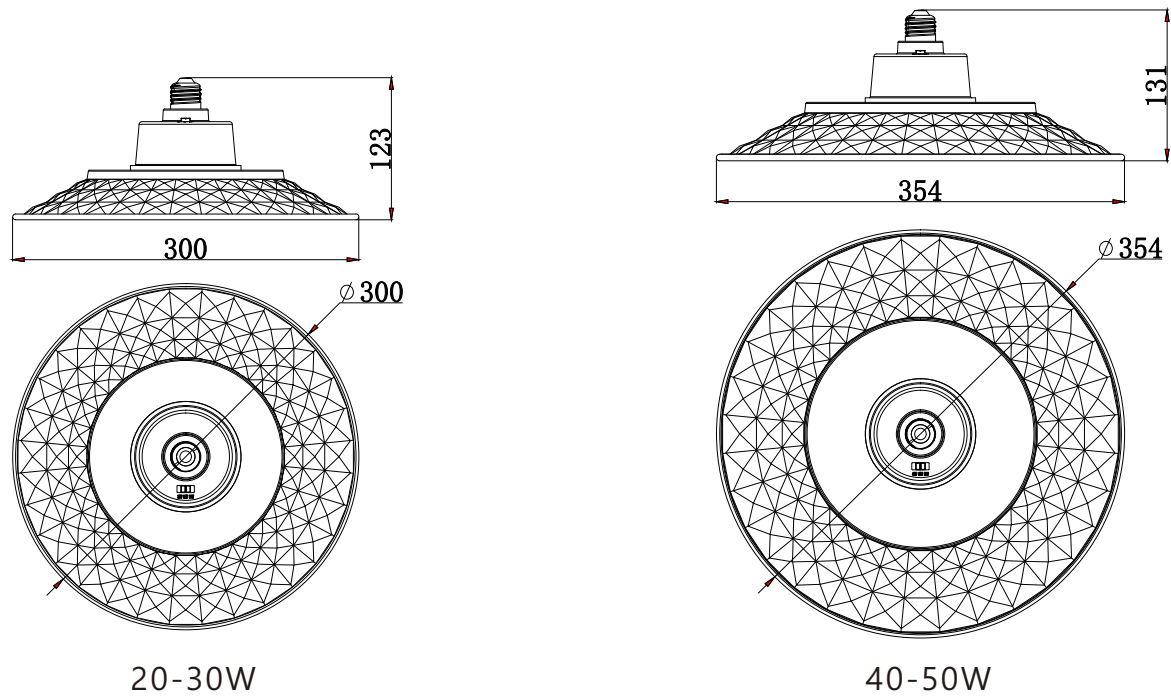


Structure Performance

Dimension: LxHxW(mm)	Φ300x123mm/Φ354x131mm
Housing:	Aluminum
Cover:	PC
Cable Length:	E26/E27
IP Rate:	IP 40


UFO13 20W-50W

Structure Performance

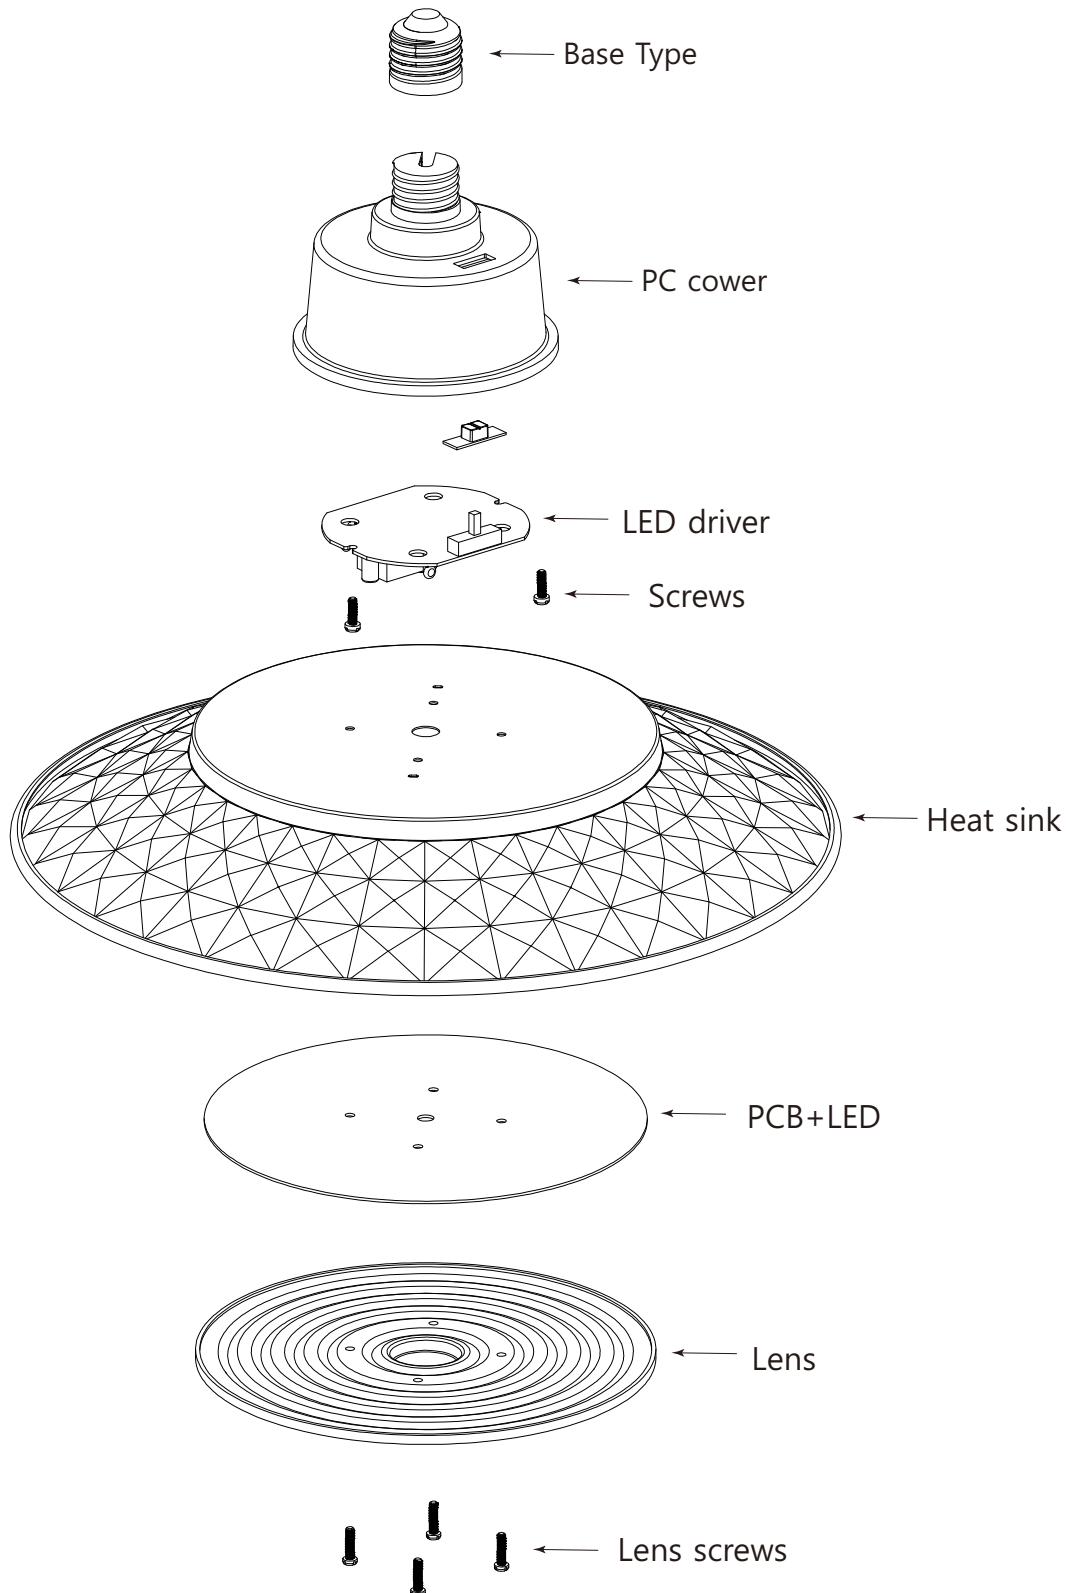


UFO13 20W-50W


Beam angle

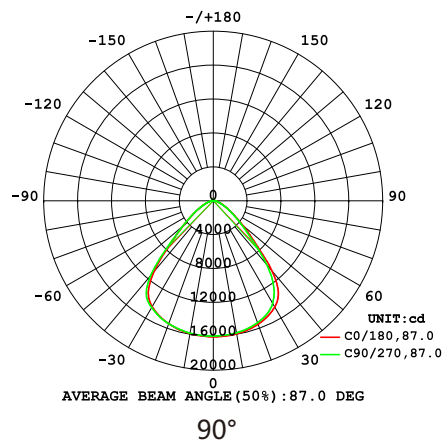

Power selectable

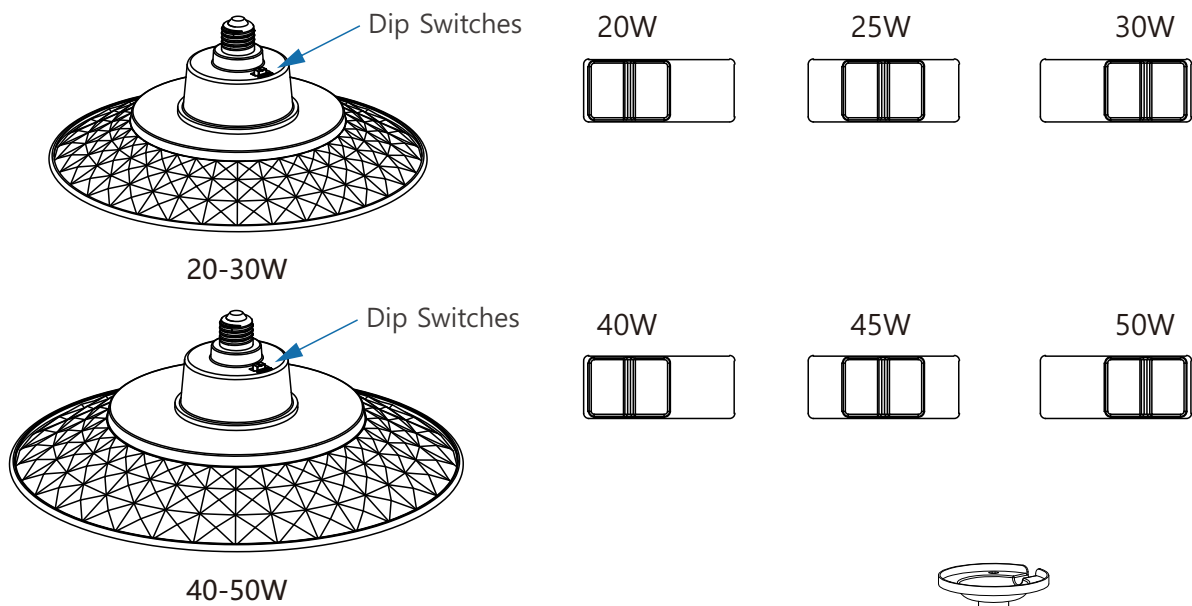

Mounting (optional)

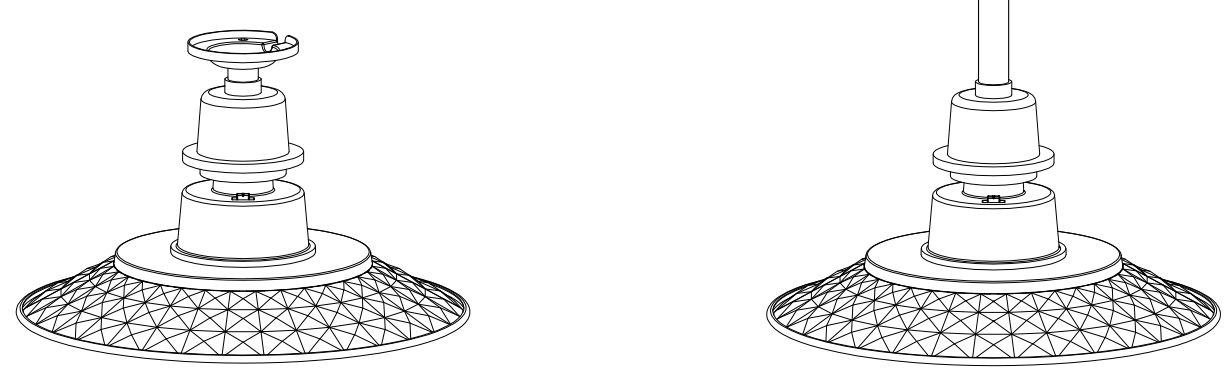

Ceiling Lamp Holder Hardware Accessorie