


LED Tunnel Light

TL 02 30W-200W

200LM/W

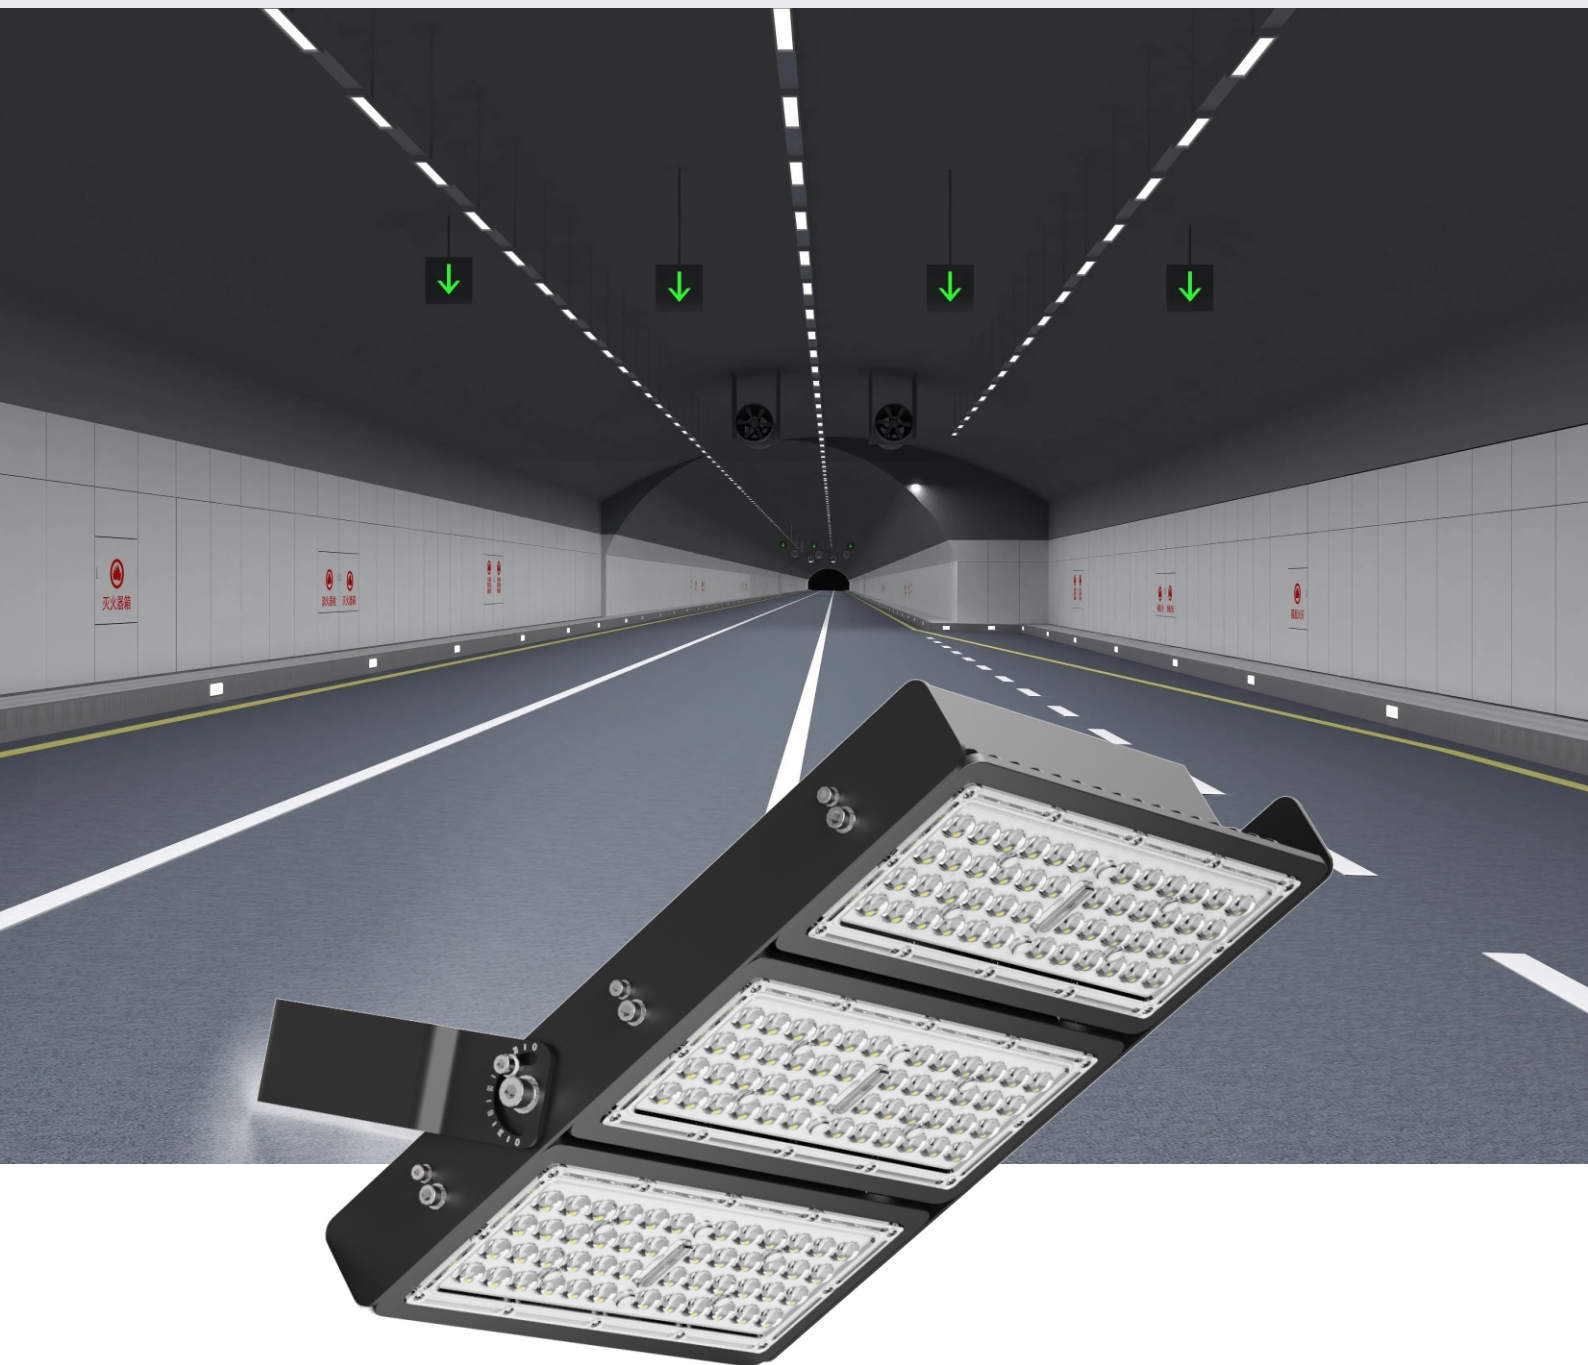

5 Years Warranty

CE RoHS

Specification

Power	30W	40W	50W	80W	90W	100W	120W	150W	180W	200W
PF	>0.95									
Input Voltage (V)	100-240VAC									
CRI	Ra70									
Efficacy (lm/W)± %	200									
Lumen output±	6000	8000	10000	16000	18000	20000	24000	30000	36000	40000
CCT (K)	3000K/3500K/4000K/4500K/5000K/5700K									
Dimming	Non-Dimming/0~10V Dimming									
Beam angle	100x120°/30°/60°/90°/120°									
Material	Body Aluminum+ PC Lens									
Operating Temperature	-30°C to 40°C									
Humidity	10%-90%									
Installation	Bracket Mounted									
LED Type	SMD5050									
Power Supply	Sosen/Becky									
Surge Protection	6KV line-line,6KVline-earth									
Certification	CE/RoHS									
IP Rate	IP65									
Warranty	5 Years									

SA-TLA00-XXXY-XXXX-B

SA-TL	A00	XXX	Y	XXXX	B
Series	Voltage	Power	CCT	Lens	Versions
SA-TL	100-240V	30W 40W 50W 80W 90W 100W 120W 150W 180W 200W	N 3000K M 3500K L 4000K K 4500K C 5000K H 5700K	100x120° 30° 60° 90° 120°	"B" The second generation

Description:

Model name description: SA-TLA00-100Y-100x120-B.

"SA" indicates the name of company producing the product;

"TL" indicates the product is a Tunnel Light;

"A00" indicates the voltage of the product;

"200" indicates the power of the product;

"Y" indicates the colour temperature of the product ;

Where the "Y" can be N=3000K, M=3500K, L=4000K, K=4500K, C=5000K, H=5700K represents color temperature;

Where XXXX represent light angle, it can be 30,60,90,120,100x120;


"B" indicates the shape size;

TL 02 30W-200W


Packing

Model No.	Power	Size(mm)	N.W	Carton Size(mm)	G.W/1PCS±0.2KG
SA-TLA00-30Y-XXXX-B	30W	294x121x134	2.6KG	L310xW190xH100	3.1KG
SA-TLA00-40Y-XXXX-B	40W	294x121x134	2.6KG	L310xW190xH100	3.1KG
SA-TLA00-50Y-XXXX-B	50W	294x121x134	2.6KG	L310xW190xH100	3.1KG
SA-TLA00-80Y-XXXX-B	80W	306x247x172	3.9KG	L320xW285xH100	4.5KG
SA-TLA00-90Y-XXXX-B	90W	306x247x172	3.9KG	L320xW285xH100	4.5KG
SA-TLA00-100Y-XXXX-B	100W	306x247x172	3.9KG	L320xW285xH100	4.5KG
SA-TLA00-120Y-XXXX-B	120W	306x373x172	5.1KG	L320xW410xH100	5.8KG
SA-TLA00-150Y-XXXX-B	150W	306x373x172	5.1KG	L320xW410xH100	5.8KG
SA-TLA00-180Y-XXXX-B	180W	306x499x172	6.4KG	L320xW540xH100	7.2KG
SA-TLA00-200Y-XXXX-B	200W	306x499x172	6.4KG	L320xW540xH100	7.2KG

Dimensions(unit: mm)

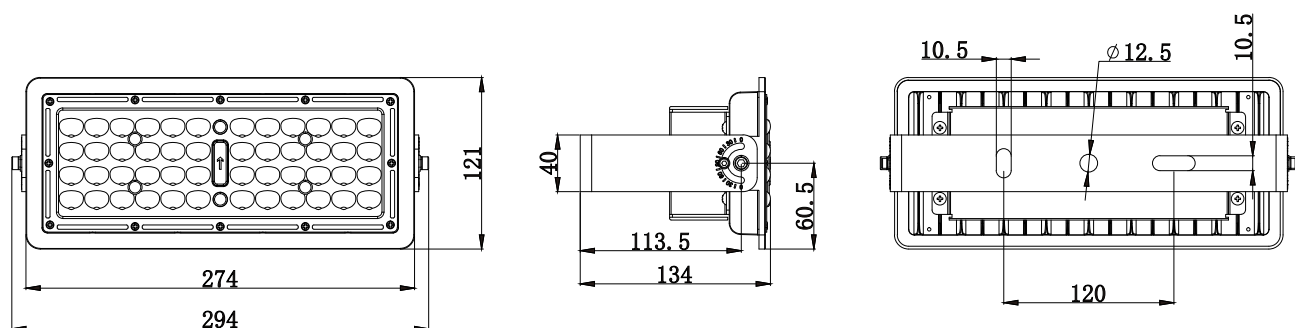


30-50W

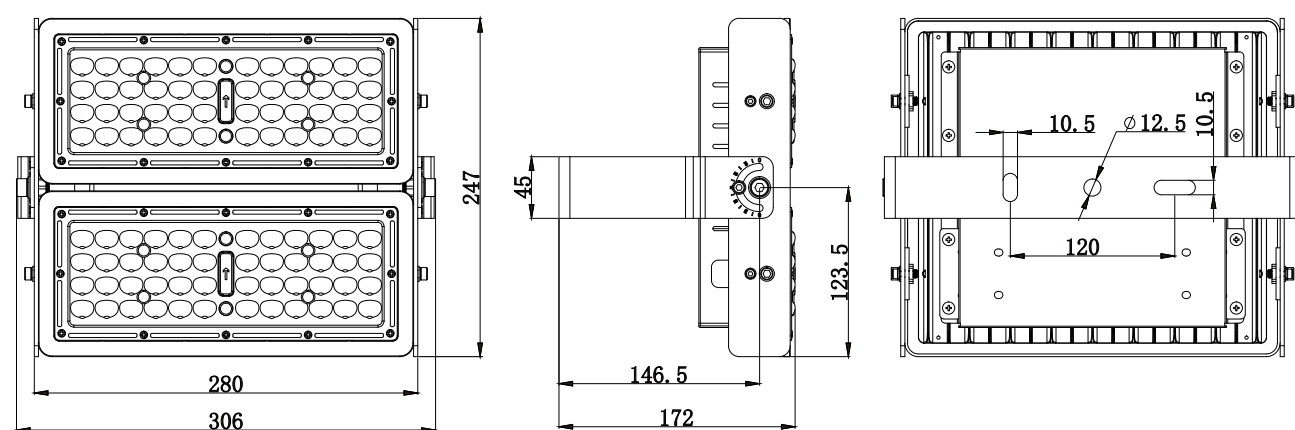


80-100W

TL 02 30W-200W

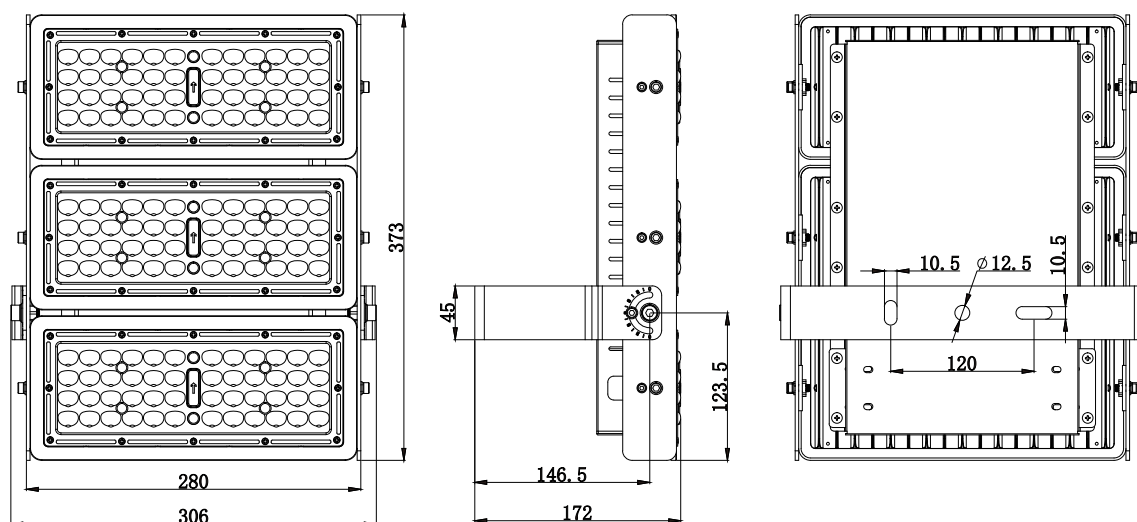

120-150W

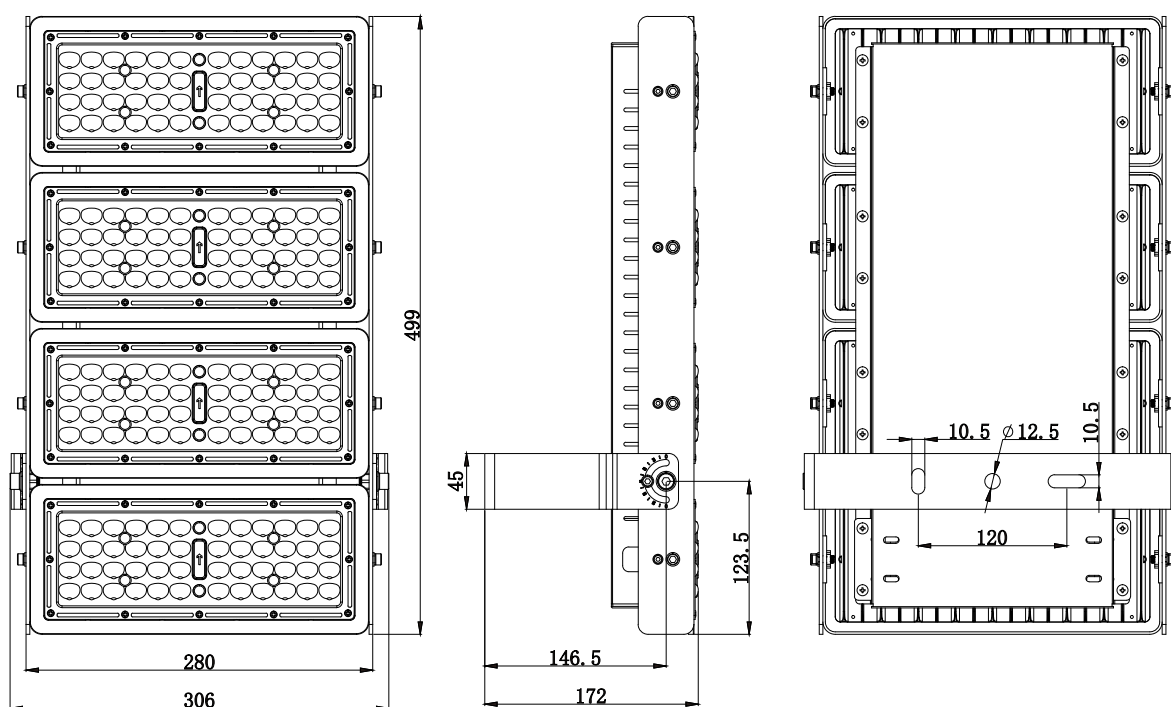


180-200W

Structure Performance

Dimension: LxHxW(mm)	294x121x134mm/306x247x172mm/306x373x172mm/306x499x172mm
Housing:	Aluminum
Cover:	PC Lens
Cable Length:	300mm
IP Rate:	IP65
IK Rate:	IK10


TL 02 30W-200W

Structure drawing

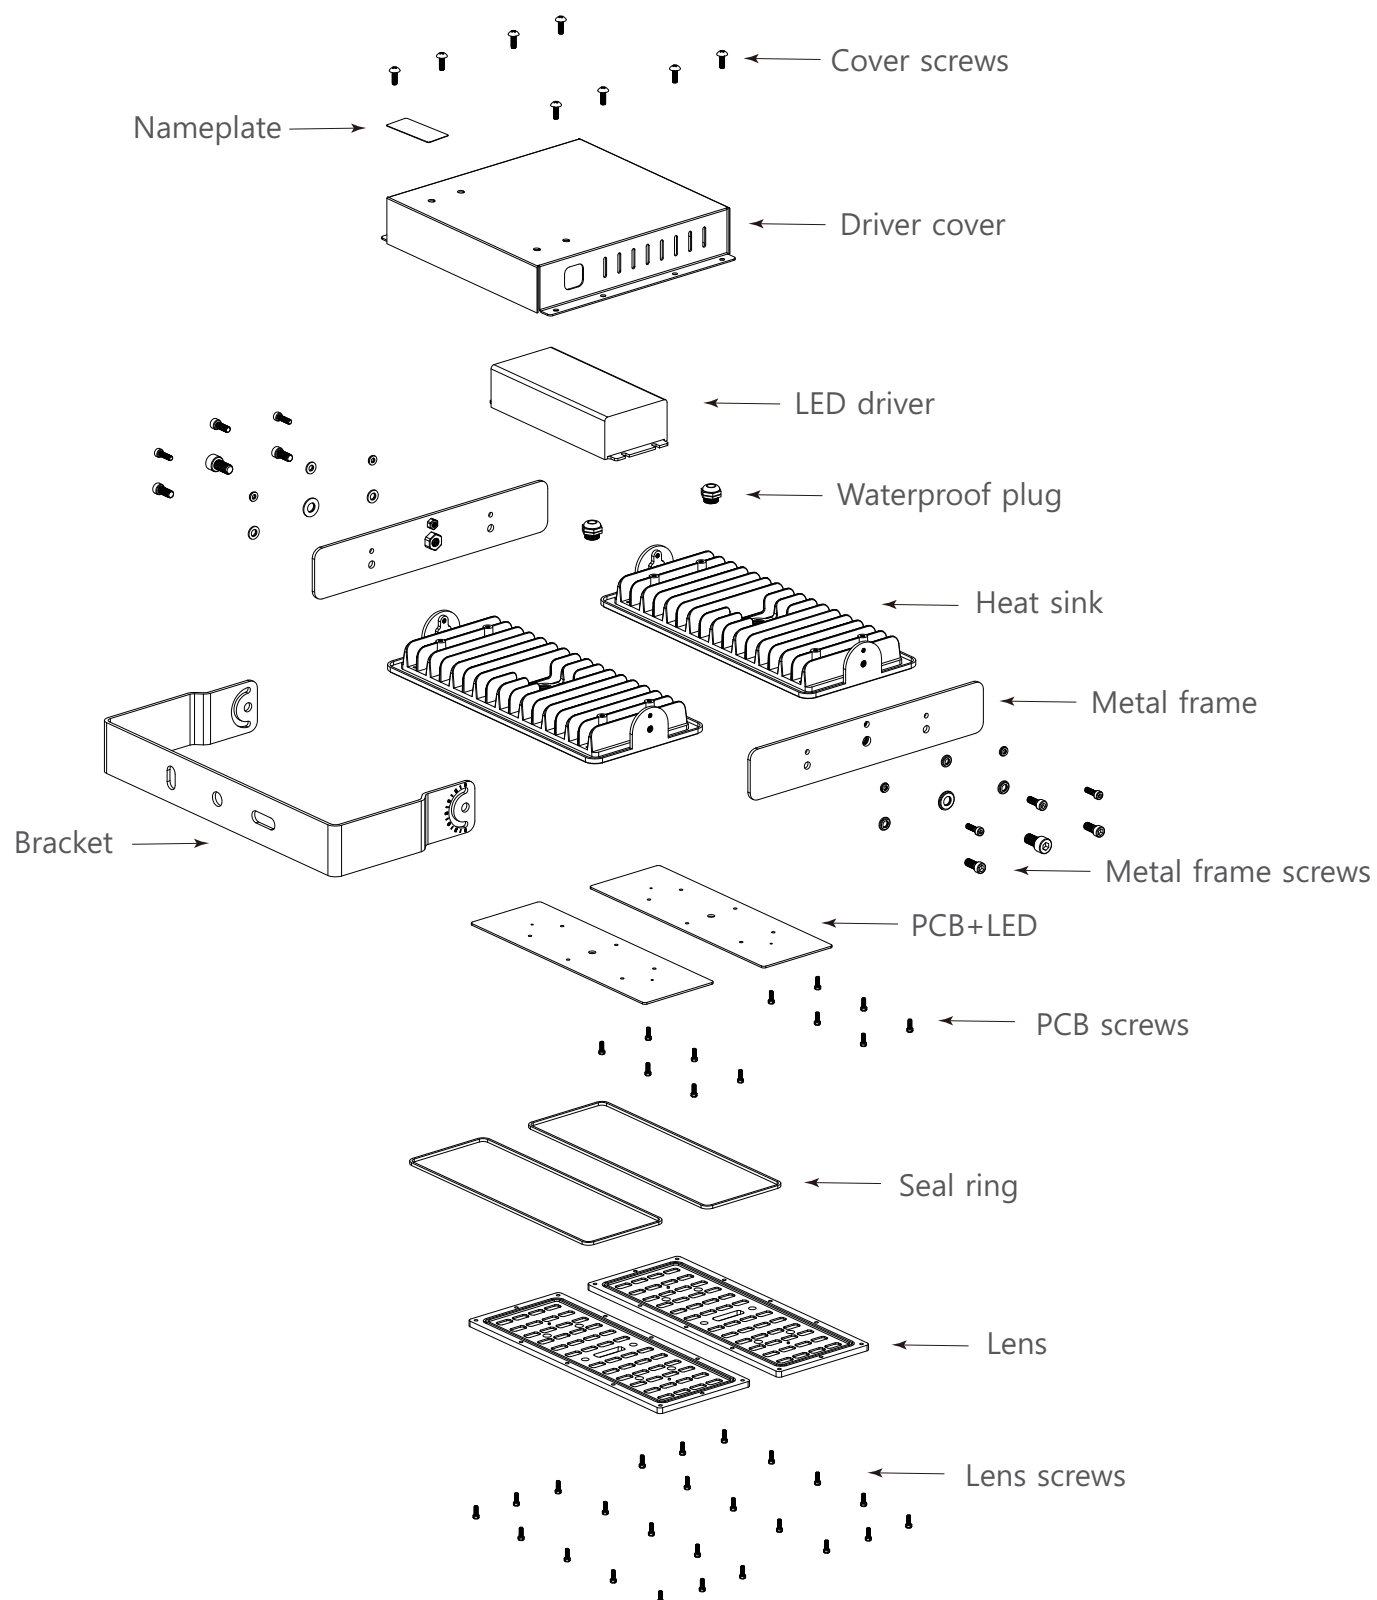


TL 02 30W-200W


Beam angle




100x120°




30°



60°





90°




120°

Installation


Bracket mounted




2-M10X90



- 1 Fasten the bracket to the wall with screws.



Installation Angle
can be adjusted

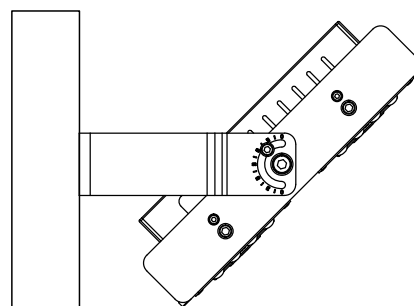

- 2 Then adjust the lamp body to the correct direction.