

**Power Selectable
UFO LED High Bay**

220LM/W

SPECIFICATIONS



5 Years Warranty

CE RoHS

UFO10 100W-240W

Specification

Model	SA-UFOA00-100W	SA-UFOA00-150W	SA-UFOA00-200W	SA-UFOA00-240W
PF	>0.95			
Input Voltage (V)	100-240VAC			
CRI	Ra70	Ra70	Ra70	Ra70
Efficacy (lm/W)± %	220	220	220	220
Lumen output±	22000	33000	44000	52800
Power selectable	100%-80%-60%			
CCT (K)	3000K/3500K/4000K/4500K/5000K/5700K			
Dimming	Non-Dimming/0~10V Dimming			
Beam angle	60°/90°/120°			
Material	Body Aluminum+ PC Lens			
Operating Temperature	-40°C to 40°C			
Humidity	10% - 90%			
Installation	Ring Mounted/Bracket Mounted			
LED Type	SMD2835			
Power Supply	Lifud/Sosen/ZH power			
Surge Protection	4KV line-line,6KVline-earth			
Certification	CE/RoHS			
IP Rate	IP65			
Warranty	5 Years			

SA-UFOA00-XXXY-XXXX-C-Z

SA-UFO	A00	XXX	Y	XXXX	B	Z
Series	Voltage	Power	CCT	Lens	Versions	Control
SA-UFO	100-277V	100W 150W 200W 240W	N 3000K M 3500K L 4000K K 4500K C 5000K H 5700K	R060 Lens 60° R090 Lens 90° R120 Lens 120°	"C" The second generation	Motion Sensor/ Power selectable/ Power & CCT selectable

Description:

Model name description: SA-UFOA00-200Y-RXXX-C.

"SA" indicates the name of company producing the product;

"UFO" indicates the product is a LED High Bay;

"A00" indicates the voltage of the product;

"200" indicates the power of the product;

"Y" indicates the colour temperature of the product ;

Where the "Y" can be N=3000K, M=3500K, L=4000K, K=4500K, C=5000K, H=5700K represents color temperature;

Where XXXX represent light angle, it can be R060,R090,R120;

"C" indicates the shape size;



"Z" indicates the Intelligent Control,Where the "Z" can be D=Power selectable,DD=Power & CCT selectable, M=Motion Sensor.

UFO10 100W-240W



Packing

Model No.	Power	Size(mm)	Carton Size(mm)	G.W/1PCS±0.2KG
SA-UFOA00-100Y-XXXX-C-D	100W	Φ262xH153	L310xW310xH160	2.3KG
SA-UFOA00-150Y-XXXX-C-D	150W	Φ307xH161	L350xW350xH170	2.8KG
SA-UFOA00-200Y-XXXX-C-D	200W	Φ335xH166	L385xW385xH175	3.3KG
SA-UFOA00-240Y-XXXX-C-D	240W	Φ335xH166	L385xW385xH175	3.3KG



Dimensions(unit: mm)

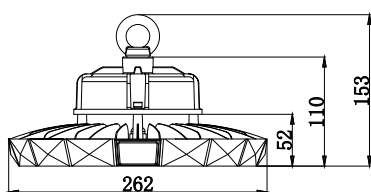

100W

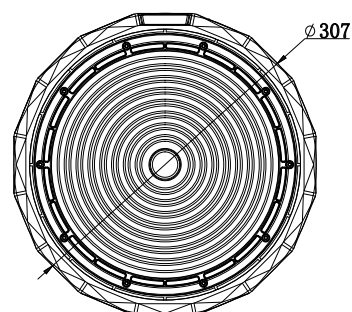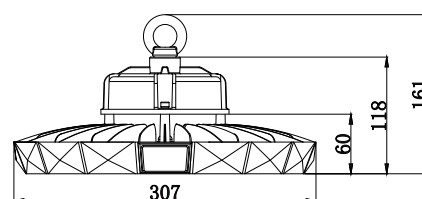

150W

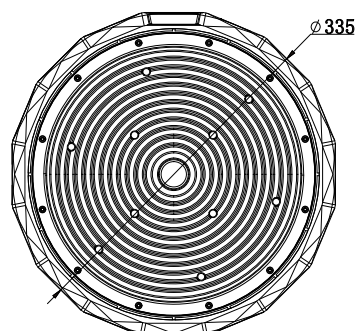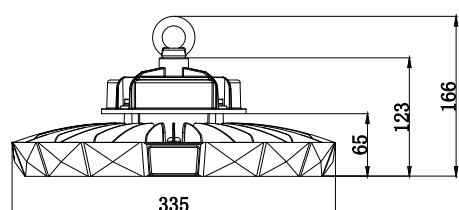


200/240W

Structure Performance


Dimension: LxHxW(mm)	Φ262xH153/Φ307xH161/Φ335xH166
Housing:	Aluminum
Cover:	PC Lens
Cable Length:	300mm
IP Rate:	IP 65
IK Rate:	IK 10

Structure drawing

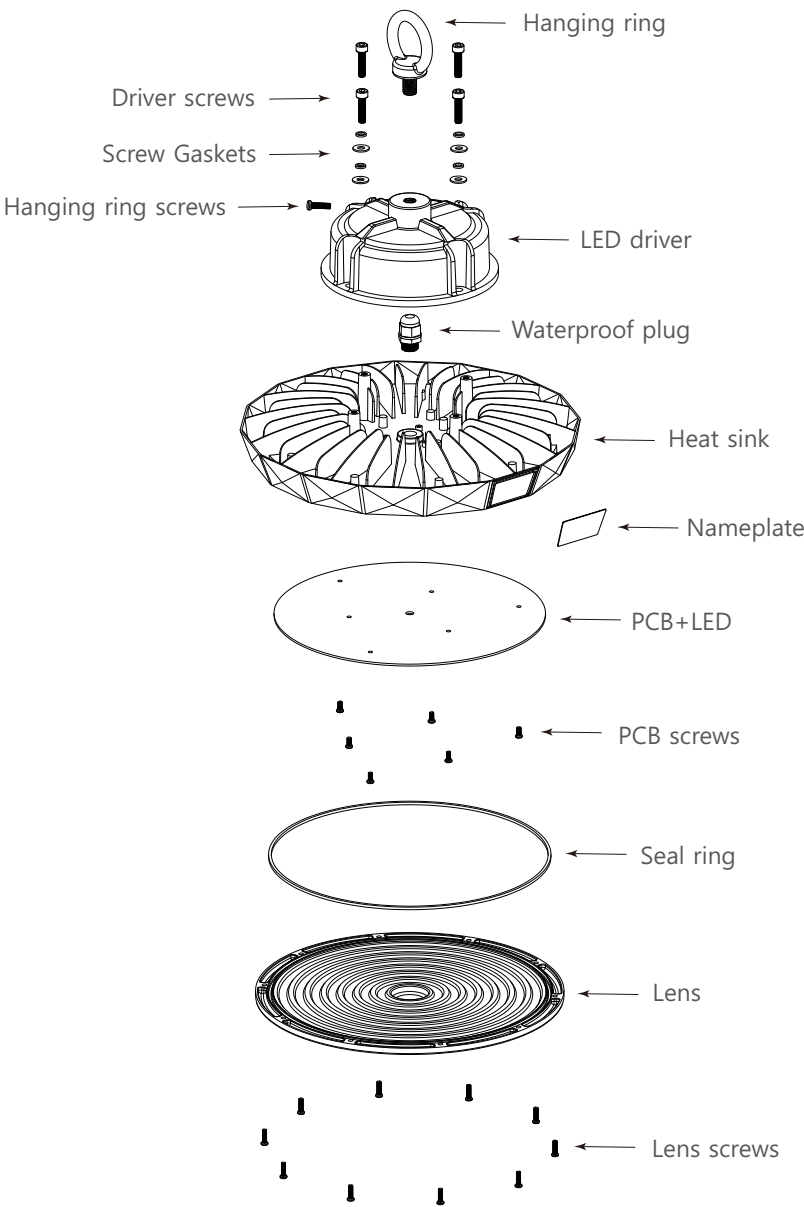


UFO10 100W-240W

Beam angle

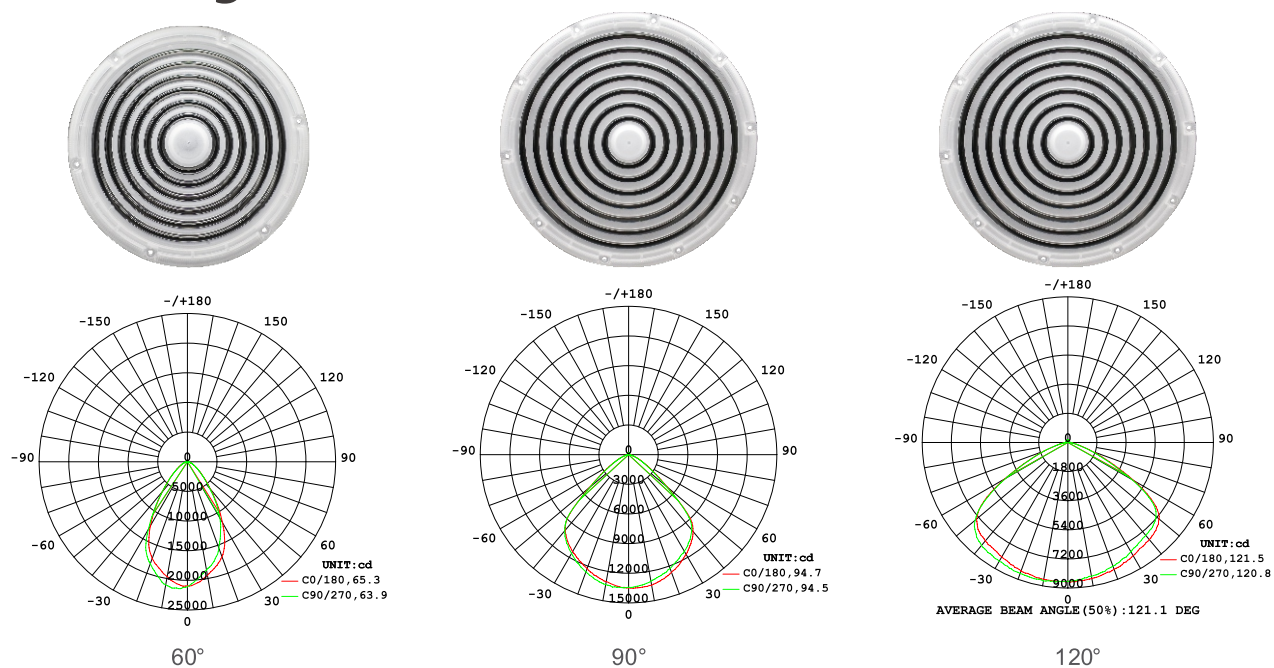


Installation


1-Ring mounted

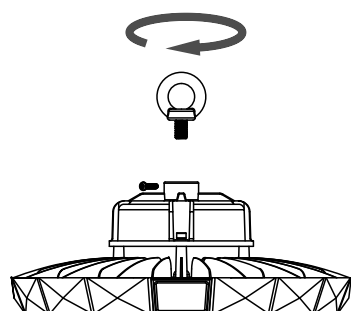

① Lock ring




② Tighten the screw fix the ring

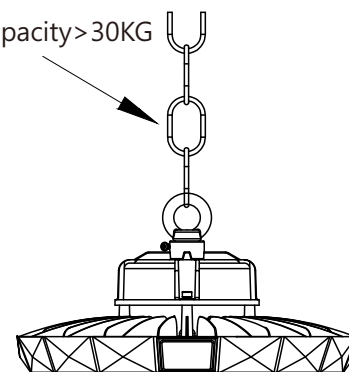


③ Hang on the hook

2-Bracket mounted

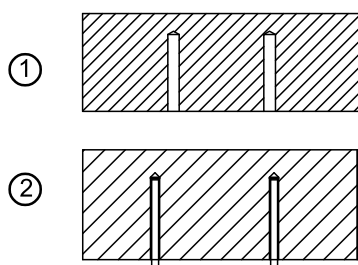


①


②



a




b



c

Power selectable

1-Lifud driver

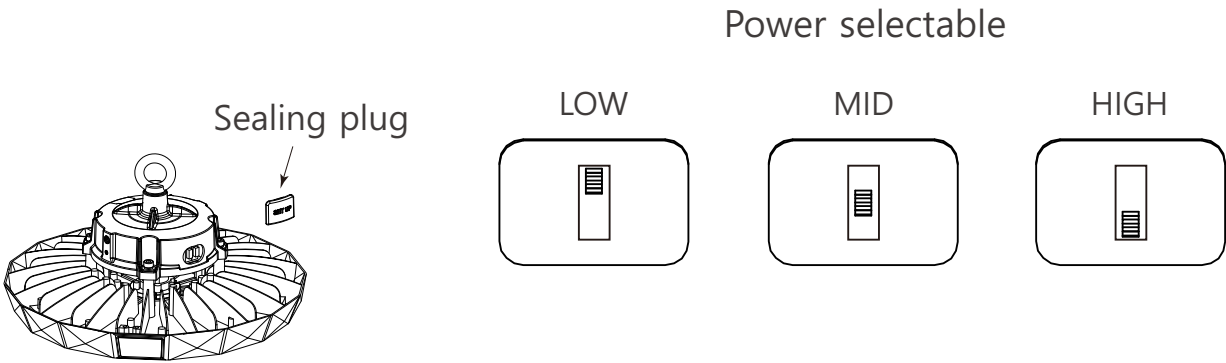

2-Sosen driver

